

Heavy


X530 EH SB

X530

Heat-resistant and full-leather mid-cut safety shoe with EH properties

Safety Jogger X530 is a durable, all-terrain safety shoe with heat-resistant outsole, waterproof features, and EH-rated nonconductive outsoles. Provides comfort and safety in high-risk environments.

Upper	Crazy Horse Leather
Lining	Membrane, 3D-Mesh
Footbed	SJ foam footbed
Midsole	Anti-puncture Textile
Outsole	PU/Rubber (NBR)
Toecap	Composite
Category	SB / PS, SR, SC, LG, WR, E, HI, CI, FO, HRO
Size range	EU 35-50 / UK 3.0-14.0 / US 3.0-15.0 JPN 21.5-33.0 / KOR 230-330
Sample weight	0.783 kg
Norms	ASTM F2413:2018 EN ISO 20345:2022

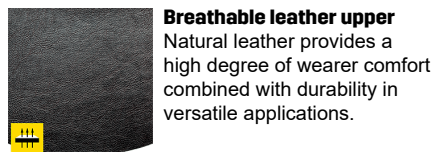

Breathable leather upper
Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.



Composite toecap
Metalfree and lightweight, no thermal or electrical conductivity




Electrical hazard (EH)
Electrical hazard (EH) rated safety shoes have nonconductive outsoles. As a secondary source of protection they reduce the potential for electric shocks under dry conditions.



Ladder Grip (LG)
Especially defined contour in the shank area of a safety shoe to provide additional safety while standing on ladders.



Heat resistant outsole (HRO)
The outsole resists high temperatures up to 300°C.



Waterproof (WR)
Waterproof footwear prevents liquids to enter into the shoe.



BRN

Industries:

Assembly, Construction, Industry, Logistics, Mining

Environments:

Muddy environment, Uneven surfaces, Wet environment

Maintenance instructions:

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
Upper	Crazy Horse Leather			
	Upper: permeability to water vapor	mg/cm²/h	4.84	≥ 0.8
	Upper: water vapor coefficient	mg/cm²	45	≥ 15
Lining	Membrane, 3D-Mesh			
	Lining: permeability to water vapor	mg/cm²/h	4.4	≥ 2
	Lining: water vapor coefficient	mg/cm²	35.9	≥ 20
Footbed	SJ foam footbed			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles	Dry 25600 cycles/Wet 12800 cycles	25600/12800
Outsole	PU/Rubber (NBR)			
	Outsole abrasion resistance (volume loss)	mm³	125 (Density: 1.15)	≤ 150
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	friction	0.41	≥ 0.31
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	friction	0.37	≥ 0.36
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	friction	0.28	≥ 0.19
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	friction	0.25	≥ 0.22
	Antistatic value	MegaOhm	N/A	0.1 - 1000
	ESD value	MegaOhm	N/A	0.1 - 100
	Heel energy absorption	J	42	≥ 20
Toecap	Composite			
	Impact resistance toecap (clearance after impact 100J)	mm	N/A	N/A
	Compression resistance toecap (clearance after compression 10kN)	mm	N/A	N/A
	Impact resistance toecap (clearance after impact 200J)	mm	17.5	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	21.0	≥ 14

Sample size:

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP



www.safetyjogger.com